
 TREE TO BE REMOVED

**SPECIFICATIONS FOR EXISTING TREES
TO BE PRESERVED DURING CONSTRUCTION**

- A. THE CONTRACTOR IS TO ASSUME ALL RESPONSIBILITY FOR THE PROTECTION OF EXISTING TREES WITHIN THE CONSTRUCTION AREA DURING ALL PHASES OF THE PROJECT.
- B. THE ROOT ZONE OF THE TREES IS TO REMAIN UNDISTURBED DURING THE CONSTRUCTION. THE ROOT ZONE IS DESCRIBED AS BEING THE SOIL AREA EXTENDING IN A 15' RADIUS FROM THE TRUNK OF THE TREE. EXCEPTIONS WILL BE MADE TO ALLOW FOR THE CONSTRUCTION OF HARDSCAPE STRUCTURES (SIDEWALKS, CURBS, ETC.) AS SHOWN ON THE DESIGN PLAN. HOWEVER, NO STRUCTURE WILL BE ALLOWED TO BE CONSTRUCTED WITHIN 3' OF THE TREE TRUNK.
- C. ROOT PRUNING TO ALLOW FOR CONSTRUCTION OF THE HARDSCAPE IS TO BE PERFORMED AFTER CONTACTING THE CITY OF XXXXXX PARKS SECTION FOR APPROVAL. PRUNING CUTS WILL BE MADE CLEAN AND SMOOTH, AND ARE TO REMAIN UNTREATED.
- D. ANY TRENCHING OR DIGGING THAT IS APPROVED WITHIN THE ROOT ZONE IS TO BE DONE BY HAND. ROOTS THAT ARE 1" OR LARGER IN DIAMETER ARE TO BE PRESERVED INTACT WITHOUT DAMAGE.
- E. WIRES, SIGNS OR ANY OTHER ITEMS SHALL NOT BE ATTACHED TO THE TREE EQUIPMENT (INCLUDING VEHICLES), MATERIALS, TEMPORARY STRUCTURES, WORK AREAS, FUELS, PAINTS, DEBRIS OR ANY OTHER CONSTRUCTION ITEMS ARE TO BE KEPT AWAY FROM THE ROOT ZONE.
- F. THE CITY OF XXXXXX PARKS SECTION WILL PERFORM ANY PRUNING OF THE TREES CROWN THAT IS NECESSARY TO COMPLETE CONSTRUCTION.
- G. THE TREES WILL BE EXAMINED WEEKLY BY THE CITY OF XXXXXX PARKS SECTION DURING THE CONSTRUCTION PERIOD. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY AND ALL DAMAGE TO THE TREE DEEMED TO HAVE BEEN INCURRED BY HIS OPERATIONS ON THE PROJECT SITE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE COST OF REMEDIAL ACTION NEEDED TO CORRECT DAMAGE TO THE TREE, OR FOR THE COST OF REPLACEMENT SHOULD IT BE NECESSARY.
- H. THE CONTRACTOR SHALL INCLUDE ALL COSTS OF PROTECTING AND PRESERVING THE TREE AS SPECIFIED HEREIN AND AS DIRECTED BY THE CITY OF XXXXXX. NO ADDITIONAL PAYMENT SHALL BE MADE THEREFORE.

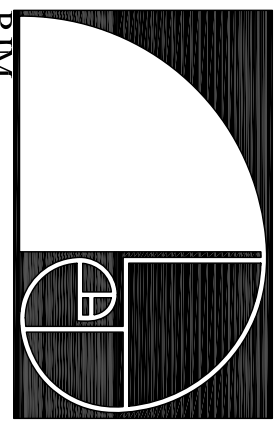

KIM DESIGN GROUP, INC.
 100 UNIVERSITY AVENUE, SUITE 101
 ANN ARBOR, MI 48106
 (734) 769-2920 • FAX (734) 762-2285


BEFORE EXCAVATING
 CALL U.S.A.
 UNDERGROUND SERVICE ALERT
 (800) 227-2600
 TWO WORKING DAYS BEFORE ALL
 PLANNED EXCAVATION WORK

CAUTION
 OVERHEAD UTILITY
 FACILITIES EXIST WITHIN
 PROJECT AREA


NO.	DATE	APPROV.	REVISION

DESIGNED:	APPROVED BY:
DRAWN:	JOSEPH SBRANTI
CHECKED:	PR. 4481, Exp. 04/20/07
REVIEWED:	City Engineer
DATE:	Date:

AMBROSE AQUATIC CENTER



City of Pittsburg

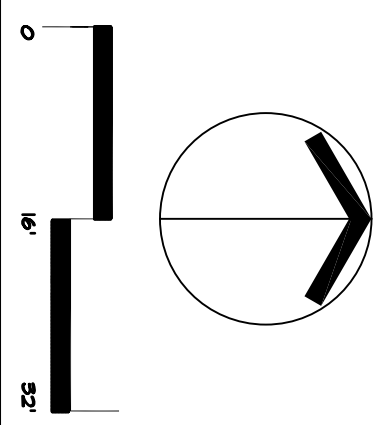

TREE REMOVAL
 PLAN
T1